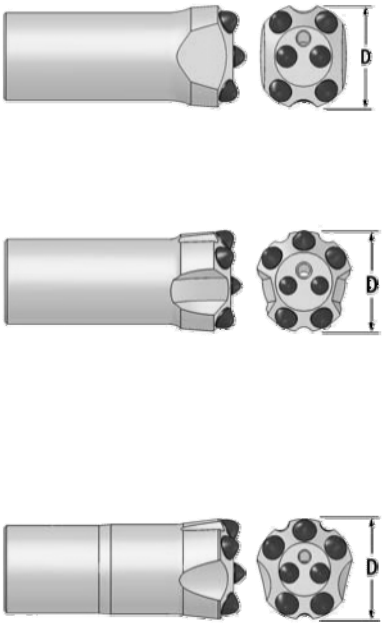
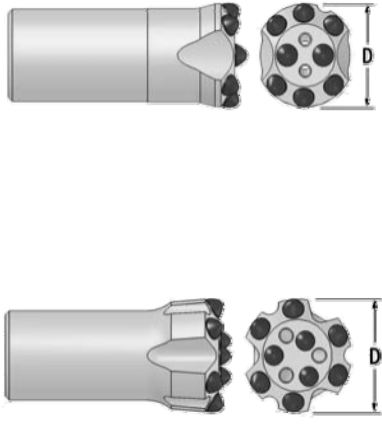














浅孔螺纹钎具

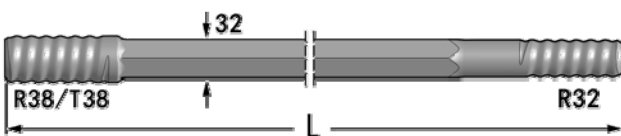

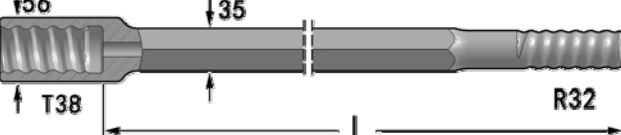
Drifting and tunneling R32

Drill bit 钎头	Diameter 直径		No×button diameter 合金数量×直径			Flushing hole 水孔		Weight Kg 重量	P/N 型号
	mm 毫米	Inch 英寸	Front 中齿	Gauge 边齿	Angle 倾角	Front 正	Side 侧		
	圆齿 Spherical buttons								
柱齿形钎头 Button bit 	41	1 5/8	2×9	4×9	35°	1×6	2×5	0.6	1431-41R32-29/49-45-41
	41	1 5/8	2×8	5×9	35°	1×5	1×7.5	0.7	1431-41R32-28/59-45-41
	43	1 11/16	2×9	5×9	35°	1×6	2×6	0.7	1431-43R32-29/59-45-41
	43	1 11/16	2×9	5×10	35°	1×5	1×7.5	0.7	1431-43R32-29/510-45-41
	43	1 11/16	2×9	6×9	40°	2×6	-	0.7	1431-43R32-29/69-45-41
	45	1 3/4	2×9	5×11	30°	1×5	1×7.5	0.8	1431-45R32-29/511-45-41
	45	1 3/4	2×9	6×10	35°	2×6	-	0.8	1431-45R32-29/610-45-41
	45	1 3/4	3×8	6×10	30°	3×4.5	-	0.8	1431-45R32-38/610-45-41
	48	1 7/8	2×9	5×11	35°	1×6	1×7.5	0.9	1431-48R32-29/511-45-41
	48	1 7/8	2×9	6×10	40°	2×7	-	0.9	1431-48R32-29/610-45-41
	48	1 7/8	3×8	6×10	40°	3×5	-	0.9	1431-48R32-38/610-45-41
	48	1 7/8	3×9	6×10	30°	3×5	-	0.9	1431-48R32-39/610-45-41
	51	2	2×10	5×12	35°	1×6	1×7.5	1.0	1431-51R32-210/512-45-41
	51	2	2×10	6×10	40°	2×7	-	1.0	1431-51R32-210/610-45-41
	51	2	3×9	6×10	35°	3×6	-	1.0	1431-51R32-39/611-45-41
	57	2 1/4	3×9	6×11	35°	3×6	-	1.3	1431-57R32-39/611-45-41
	64	2 1/2	3*10, 1*10	6×11	35°	3×7	-	1.6	1433-64R32-410/611-45-41
	抛物线齿 Ballistic buttons								
	41	1 5/8	2×8	5×9	40°	1×5	1×7.5	0.7	1431-41R32-28/59-45-51
	43	1 11/16	2×9	5×9	40°	1×6	2×6	0.7	1431-43R32-29/59-45-51
	43	1 11/16	2×9	6×9	40°	2×6	-	0.7	1431-43R32-29/69-45-51
	43	1 11/16	3×8	6×8	40°	3×4.5	1×4.5	0.7	1431-43R32-38/68-45-51
	45	1 3/4	2×9	5×11	30°	1	2	0.8	1431-45R32-29/511-45-51
	45	1 3/4	2×9	6×9	40°	2	2	0.8	1431-45R32-29/69-45-51
	45	1 3/4	3×8	6×9	40°	3	1	0.8	1431-45R32-38/69-45-51
	48	1 7/8	2×9	5×11	35°	1×6	1×7.5	0.9	1431-48R32-29/511-45-51
	48	1 7/8	2×9	6×10	40°	2×7	-	0.9	1431-48R32-29/610-45-51
	48	1 7/8	3×8	6×10	40°	3×5	-	0.9	1431-48R32-38/610-45-51
	51	2	2×10	6×10	40°	2×7	-	1.0	1431-51R32-210/610-45-51
	51	2	3×9	6×10	40°	3	1	1.0	1431-51R32-39/610-45-51
	54	2 1/8	3×9	6×10	40°	3	1	1.0	1431-54R32-39/610-45-51
	57	2 1/4	3×9	6×11	35°	3×6	-	1.3	1431-57R32-39/611-45-51
	64	2 1/2	4×10	8×10	40°	2×9	-	1.6	1431-64R32-410/810-45-51

Drill bit 钎头	Diameter 直径		No×button diameter 合金数量×直径			Flushing hole 水孔		Weight (kg) 重量	P/N 型号
	mm 毫米	Foot 英尺	Front 中齿	Gauge 边齿	Angle 倾角	Front 正	Side 侧		
	圆齿 Spherical buttons								
柱齿易返钎头 Retrac button bit 	45	1 3/4	3×8	6×9	40°	3×4.5	-	1.1	1531-45R32-38/69-45-41
	48	1 7/8	3×9	6×10	30°	3×5	-	1.2	1531-48R32-39/610-45-41
	51	2	3×9	6×10	30°	3×6	-	1.4	1531-51R32-39/610-45-41
	64	2 1/2	3×10, 1×10	6×11	35°	3×7	-	2.2	1533-64R32-410/611-45-41
	64	2 1/2	4×10	8×10	40°	2×9	-	2.2	1531-64R32-410/810-45-41
	76	3	4×11, 1×11	8×11	35°	4	1	3.5	1533-76R32-511/811-45-41
	抛物线齿 Ballistic buttons								
柱齿扩孔钎头 Dome bit for reaming 	45	1 3/4	3×8	6×9	40°	3×4.5	-	1.1	1531-45R32-38/69-45-51
	48	1 7/8	3×9	6×10	30°	3×5	-	1.2	1531-48R32-39/610-45-51
	51	2	3×9	6×10	30°	3×6	-	1.4	1531-51R32-39/610-45-51
	64	2 1/2	3×10, 1×10	6×11	35°	3×7	-	2.2	1533-64R32-410/611-45-51
	64	2 1/2	4×10	8×10	40°	2×9	-	2.2	1531-64R32-410/810-45-51
	76	3	4×11, 1×11	8×11	35°	4	1	3.5	1533-76R32-511/811-45-51
	圆齿 Spherical buttons								
柱齿扩孔钎头 Dome bit for reaming 	76	3	1×13	9×13	35°	3	1	2.0	1441-76R32-113/913-45-41
	89	3 1/2	1×13	14×13	35°	2×6	2×6	2.6	1441-89R32-113/1413-45-41
	102	4	1×13	16×13	35°	2×6	2×6	3.2	1441-102R32-113/1613-41
	127	5	1×13	18×13	35°	3	1	4.8	1441-127R32-113-1813-41
	抛物线齿 Ballistic buttons								
扩孔钎头 Reaming bit 6° 	76	3	1×13	9×13	35°	3	1	2.0	1441-76R32-113/913-45-51
	89	3 1/2	1×13	14×13	35°	2×6	2×6	2.6	1441-89R32-113/1413-45-51
	102	4	1×13	16×13	35°	2×6	2×6	3.2	1441-102R32-113/1613-51
	127	5	1×13	18×13	35°	3	1	4.8	1441-127R32-113-1813-51
	扩孔钎头 Reaming bit 6° 								
扩孔钎头 Reaming bit 6° 	64	2 1/2	2×10	8×9	35°	-	-	0.8	1441-646-210/89-45-41
	64	2 1/2	4×8	8×9	25°	-	-	0.8	1441-646-48/89-45-41
	76	3	2×11	8×11	35°	-	-	1.2	1441-766-211/811-45-41
	76	3	4×10	8×10	30°	-	-	1.2	1441-766-410/810-45-41
	89	3 1/2	4×11	8×11	35°	-	-	1.7	1441-896-411/811-45-41
	89	3 1/2	4×10	8×10	30°	-	-	1.7	1441-896-410/810-45-41

扩孔导向器 Pilot adapter 6° 	26	1 1/32	12×8		-	-	-	1.5	1442-26r32-12/8-42-22
扩孔钎头 Reaming bit 12° 	89	3 1/2	4×10	8×12	35°	-	-	1.8	1441-8912-410/812-45-41
	102	4	4×12	8×12	35°	-	-	2.1	1441-10212-412/812-45-41
	127	5	4×12	8×12	35°	-	-	4.0	1441-12712-412/812-45-41
	127	5	4×13	8×13	35°	-	-	4.0	1441-12712-413/813-45-41
扩孔导向器 Pilot adapter 12° 	40	1 37/64	15×10		-	-	-	2.2	1442-40r32-15/10-42-22
十字型钎头 Cross-type bit 	41	1 5/8	16×10		-	1	4	0.7	1221-41R32-16/10-42-23
	43	1	16×10		-	1	2	0.8	1221-43R32-16/10-42-23
	45	11/16	16×10		-	1	4	0.9	1221-45R32-16/10-42-23
	48	1 3/4	16×10		-	1	4	0.9	1221-48R32-16/10-45-23
	51	1 7/8	16×10		-	1	4	1.2	1221-51R32-16/10-45-23
	57	2	16×10		-	1	4	1.3	1221-57R32-16/10-45-23
	64	2 1/4	18×13		-	1	4	1.5	1221-64R32-18/13-45-23
		2 1/2							

Coupling 连接套	Length 长度		Diameter 直径		Thread 螺纹	Weight 重量 Kg	P/N 型号
	mm 毫米	Inch 英寸	mm 毫米	Inch 英寸			
同径连接套 Coupling sleeves 	170	6 3/4	55	2	R38	1.2	31-R38-55-170-23
	191	7 1/2	52	2 5/32	T38	1.3	31-T38-55-190-23
变径连接套 Coupling sleeves of different diameter 	150	6 1/8	45	1 3/4	R25-R32	1.1	33-R25/R32-45-150-23
	160	6 1/4	45	1 3/4	R25-R32	1.2	33-R25/R32-45-160-23
	160	6 1/4	45	1 3/4	R28-R32	1.2	33-R28/R32-45-160-23
	160	6 1/4	55	2 5/32	R32-R38	1.8	33-R32/R38-45-160-23
	170	6 3/4	55	2 5/32	R32-R38	2.0	33-R32/R38-45-170-23
	180	7 1/16	55	2 5/32	R32-R38	2.2	33-R32/R38-45-180-23
	210	8 1/4	55	2 5/32	R32-R38	2.8	33-R32/R38-45-210-23
	170	6 3/4	56	2 1/8	R32-T38	2.1	33-R32/T38-45-170-23
	180	7 1/16	56	2 1/8	R32-T38	2.2	33-R32/T38-45-180-23
	210	8 1/4	56	2 1/8	R32-T38	2.8	33-R32/T38-45-210-23
	190	7 1/2	63	2 33/64	R32-T45	3.2	33-R32/T45-45-190-23

Drill rod 钎杆	Length 长度		Diameter 直径		Weight kg 重量	P/N 型号
	mm 毫米	Foot 英尺	mm 毫米	Inch 英寸		
六方钎杆 Drifter rod, R/T38-Hex32-R32 内孔 Flushing hole 9.6mm. 	2400	7' 10"	32	1 1/4	15.3	22H32-R32/T38-2400-23
	3090	10' 11/2"	32	1 1/4	19.8	22H32-R32/T38-3090-23
	3400	11' 13/4"	32	1 1/4	21.7	22H32-R32/T38-3400-23
	4000	13' 13/8"	32	1 1/4	25.5	22H32-R32/T38-4000-23
	4310	14' 11/2"	32	1 1/4	27.5	22H32-R32/T38-4310-23
	4920	16' 11/2"	32	1 1/4	31.3	22H32-R32/T38-4920-23
	5530	18' 11/2"	32	1 1/4	35.2	22H32-R32/T38-5530-23
六方钎杆 Drifter rod, R/T38-Hex35-R32 内孔 Flushing hole 9.5mm. 	3090	10' 11/2"	35	1 3/8	24.0	22H35-R32/T38-3090-23
	3700	12' 11/2"	35	1 3/8	28.7	22H35-R32/T38-3700-23
	4000	13' 13/8"	35	1 3/8	31.1	22H35-R32/T38-4000-23
	4310	14' 11/2"	35	1 3/8	33.4	22H35-R32/T38-4310-23
	4920	16' 11/2"	35	1 3/8	37.8	22H35-R32/T38-4920-23
	5530	18' 11/2"	35	1 3/8	42.9	22H35-R32/T38-5530-23
	6100	20'	35	1 3/8	47.3	22H35-R32/T38-6100-23
六方快接钎杆 Speedrod, T38-Hex35-R32 内孔 Flushing hole 9.5mm. 	3700	12' 11/2"	35	1 3/8	29.0	24H35-R32/T38-3700-23
	4310	14' 11/2"	35	1 3/8	34.1	24H35-R32/T38-4310-23
	4920	16' 11/2"	35	1 3/8	38.8	24H35-R32/T38-4920-23
	5530	18' 11/2"	35	1 3/8	43.6	24H35-R32/T38-5530-23
	6400	21'	35	1 3/8	50.3	24H35-R32/T38-6400-23

SHANDONG TAISHAN ROCK TOOLS CO., LTD

Mr:Rock Sui

Tel: 0086-635-6515509

Fax:0086-635-6515678

Mobile: +86 135 6302 6509

+86 138 6352 6509

Email:chinarocktool@163.com

rockdrillingtools@163.com

export@china-rocktool.com

export@rockdrillingtools.com

WeChat: +86 13563026509

WhatsApp: +86 135 6302 6509

SKYPE: sui671100

Website: www.rockdrillingtools.com

www.china-rocktool.com

ADD: Xihu Town 10 #, Yanggu ,Liaocheng city , Shandong province , China