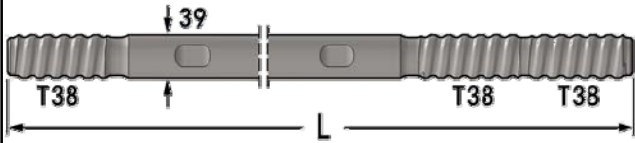
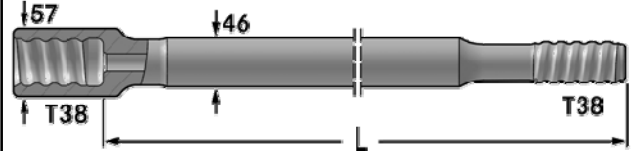
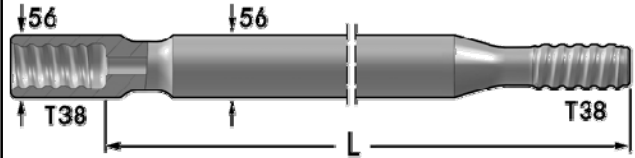
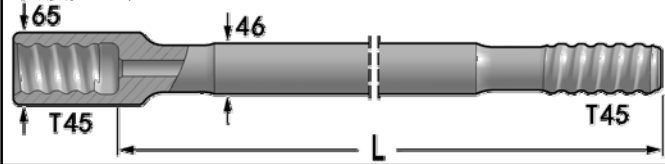
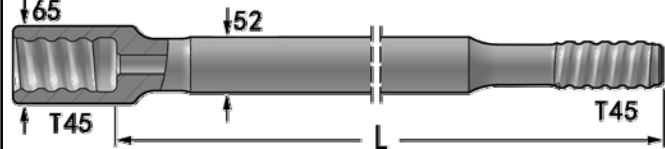
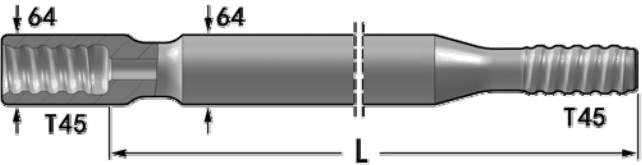
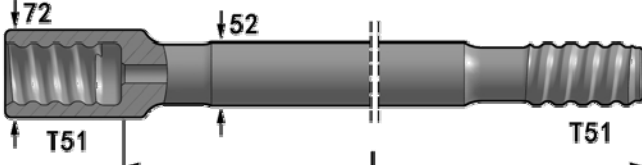
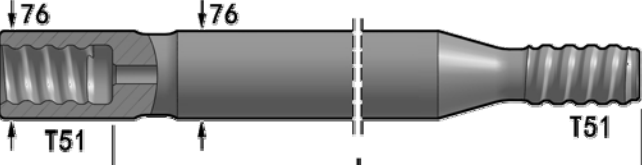


MF- ROD

快接钎杆

Drill rod 钎杆	Length 长度		Diameter 直径		Weight 重量	P/N 型号
	mm 毫米	Foot 英尺	mm 毫米	Inch 英寸		
快接钎杆 MF-rod R32-Round32-R32 内孔 Flushing hole 9.2mm. 扳手槽 Wrench flat 25.4mm.	915	3	32	1 1/4	5.5	24R32-R32/46-0915-23
	1220	4	32	1 1/4	7.3	24R32-R32/46-1220-23
	1525	5	32	1 1/4	9.0	24R32-R32/46-1525-23
	1830	6	32	1 1/4	10.6	24R32-R32/46-1830-23
	2435	8	32	1 1/4	14.0	24R32-R32/46-2435-23
	3050	10	32	1 1/4	17.1	24R32-R32/46-3050-23
	3660	12	32	1 1/4	20.7	24R32-R32/46-3660-23
导向快接钎杆 Guide speedrod R32-Round39-R32 内孔 Flushing hole 14.5mm. 快接头直径 Female end OD 46mm.	3050	10	39	1 1/2	27.0	24R39-R32/46-3050-23
	3660	12	39	1 1/2	32.0	24R39-R32/46-3660-23
导向钻杆 Guide tube D46 适用 51-64mm 钎头 D46 for bits from 51-64mm	1220	4	46	1 3/4	10.0	24R46-R32/46-1220-23
	1525	5	46	1 3/4	12.5	24R46-R32/46-1525-23
	1830	6	46	1 3/4	14.2	24R46-R32/46-1830-23
	3050	10	46	1 3/4	25.0	24R46-R32/46-3050-23
快接钎杆 MF-rod T38-Round39-T38 内孔 Flushing hole 14.5mm.	915	3	39	1 1/2	10.7	24R39-T38/57-0915-23
	1220	4	39	1 1/2	13.3	24R39-T38/57-1220-23
	1525	5	39	1 1/2	15.8	24R39-T38/57-1525-23
	1830	6	39	1 1/2	20.9	24R39-T38/57-1830-23
	3050	10	39	1 1/2	26.0	24R39-T38/57-3050-23
	3660	12	39	1 1/2	31.4	24R39-T38/57-3660-23
	4270	14	39	1 1/2	35.7	24R39-T38/57-4270-23
	4880	16	39	1 1/2	41.5	24R39-T38/57-4880-23
	5530	18' 11/2"	39	1 1/2	46.8	24R39-T38/57-5530-23
	6095	20	39	1 1/2	51.4	24R39-T38/57-6095-23

<p>双头螺纹钎杆 Double thread rod T38-Round39-T38 内孔 Flushing hole 14.5mm. 扳手槽 Wrench flat 32mm.</p> 	<p>3050 3660</p>	<p>10 12</p>	<p>46 46</p>	<p>1 3/4 1 3/4</p>	<p>35.9 43.1</p>	<p>23R39-T38/2T38-3050-23 23R39-T38/2T38-3660-23</p>
<p>导向快接钎杆 Guide speedrod T38-Round46-T38 内孔 Flushing hole 17mm. 快接头直径 Female end OD 57mm.</p> 	<p>1830 3050 3660 4270 4880 5530 6095</p>	<p>6 10 12 14 16 18' 11' 2"</p>	<p>46 46 46 46 46 46 46</p>	<p>1 3/4 1 3/4 1 3/4 1 3/4 1 3/4 1 3/4 1 3/4</p>	<p>21.6 35.9 43.1 50.2 57.4 65.0 71.7</p>	<p>24R46-T38/57-1830-23 24R46-T38/57-3050-23 24R46-T38/57-3660-23 24R46-T38/57-4270-23 24R46-T38/57-4880-23 24R46-T38/57-5530-23 24R46-T38/57-6095-23</p>
<p>导向钻杆 Guide tube D56 适用 64-76mm 钎头, D64 适用 76-89mm 钎头 D56 for bits from 64-76mm and D64 for bits from 76-89mm 快接头直径 Female end OD 56/64mm</p> 	<p>1220 1525 1830 3050 3660 4920 3660</p>	<p>4 5 6 10 12 16' 2"</p>	<p>56 56 56 56 56 56 64</p>	<p>2 1/8 2 1/8 2 1/8 2 1/8 2 1/8 2 1/8 2 1/2</p>	<p>12.6 14 17.4 28.3 32.8 47.9 51</p>	<p>24G56-T38/56-1220-23 24G56-T38/56-1525-23 24G56-T38/56-1830-23 24G56-T38/56-3050-23 24G56-T38/56-3660-23 24G56-T38/56-4920-23 24G64-T38/64-3660-23</p>
<p>快接钎杆 MF-rod T45-Round46-T45 内孔 Flushing hole 17mm. 快接头直径 Female end OD 65mm</p> 	<p>1830 3050 3660 4880 5530 6095</p>	<p>6 10 12 16 18 20</p>	<p>46 46 46 46 46 46</p>	<p>1 3/4 1 3/4 1 3/4 1 3/4 1 3/4 1 3/4</p>	<p>22.1 36.4 43.6 57.9 65.5 72.2</p>	<p>24R46-T45/65-1830-23 24R46-T45/65-3050-23 24R46-T45/65-3660-23 24R46-T45/65-4880-23 24R46-T45/65-5530-23 24R46-T45/65-6095-23</p>
<p>导向快接钎杆 Guide speedrod T45-Round52-T45 内孔 Flushing hole 21.5mm. 快接头直径 Female end OD 65mm.</p> 	<p>3050 3660 4880 5530 6095</p>	<p>10 12 16 18 20</p>	<p>52 52 52 52 52</p>	<p>2 2 2 2 2</p>	<p>46.6 55.8 74.2 84.0 92.6</p>	<p>24R52-T45/65-3050-23 24R52-T45/65-3660-23 24R52-T45/65-4880-23 24R52-T45/65-5530-23 24R52-T45/65-6095-23</p>

<p>导向钻杆 Guide tube D64 适用 76—89mm 钎头, D76 适用 89—102mm 钎头 D64 for bits from 76-89mm and D76 for bits from 89-102mm</p> 	1220 1525 1830 3050 3660 1830 3660	4 5 6 10 12 6 12	64 64 64 64 64 76 76	2 1/8 2 1/8 2 1/8 2 1/8 2 1/8 3 3	12.6 14 17.4 28.3 32.8 40.0 77.8	24G64-T45/64-1220-23 24G64-T45/64-1525-23 24G64-T45/64-1830-23 24G64-T45/64-3050-23 24G64-T45/64-3660-23 24G64-T45/64-1830-23 24G64-T45/64-3660-23
<p>快接钎杆 MF-rod T51-Round52-T51 内孔 Flushing hole 21.5mm. 快接头直径 Female end OD 72mm</p> 	1830 3050 3660 4880 5530 6095	6 10 12 16 18 20	52 52 52 52 52 52	2 2 2 2 2 2	28.2 46.6 55.6 74.2 84.1 92.7	24G52-T51/72-1830-23 24G52-T51/72-3050-23 24G52-T51/72-3660-23 24G52-T51/72-4880-23 24G52-T51/72-5530-23 24G52-T51/72-6095-23
<p>导向钻杆 Guide tube D76 适用 89—102 钎头, D87 适用 102—127 钎头 D76 for bits from 89-102mm and D87 for bits from 102-127mm 快接头直径 Female end OD 76/87mm</p> 	1830 3660 3660	6 12 12	76 76 87	3 3 3	42.0 81.0 83.0	24G76-T51/76-1830-23 24G76-T51/76-3660-23 24G76-T51/87-3660-23

SHANDONG TAI SHAN ROCK TOOLS CO., LTD

Mr:Rock Sui

Tel: 0086-635-6515509

Fax:0086-635-6515678

Mobile: +86 135 6302 6509

+86 138 6352 6509

Email:chinarocktool@163.com

rockdrillingtools@163.com

export@china-rocktool.com

export@rockdrillingtools.com

WeChat: +86 13563026509

WhatsApp: +86 135 6302 6509

SKYPE: sui671100

Website: www.rockdrillingtools.com

www.china-rocktool.com

ADD: Xihu Town 10#, Yanggu ,Liaocheng city , Shandong province , China

