



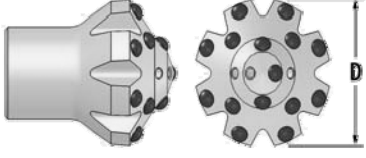

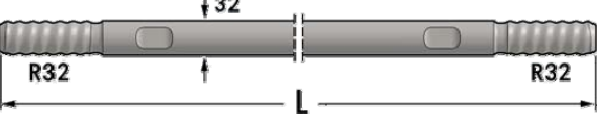
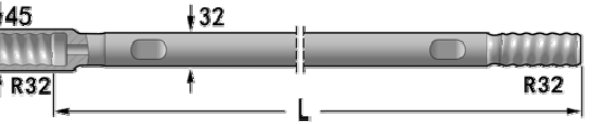



深孔螺纹钎具 Bench drilling R32


Drill bit 钎头	Diameter 直径		No×button diameter 合金数量×直径			Flushing hole 水孔		Weight Kg 重量	P/N 型号	
	mm 毫米	Inch 英寸	Front 中齿	Gauge 边齿	Angle 倾角	Front 正	Side 侧			
	圆齿 Spherical buttons									
柱齿形钎头 Button bit 	48	1 7/8	2×9	5×11	35°	1	2	1.0	1431-48R32-29/511-45-31	
	48	1 7/8	3×8	6×10	40°	3	1	0.9	1431-48R32-38/610-45-31	
	51	2	2×10	5×11	35°	1	2	1.0	1431-51R32-210/511-45-31	
	51	2	2×10	6×10	40°	2×7	-	1.0	1431-51R32-210/610-45-31	
	51	2	3×9	6×10	35°	3×6	-	1.0	1431-51R32-39/610-45-31	
	51	2	3×9	6×10	30°	3	1	1.0	1431-51R32-39/610-45-31	
	57	2 1/4	3×9	6×11	35°	3×6	-	1.3	1431-57R32-39/611-45-31	
	57	2 1/4	3×10	6×11	35°	3×6	-	1.3	1431-57R32-310/611-45-31	
	64	2 1/2	3*10, 1*10	6×11	35°	3×7	-	1.6	1433-64R32-410/611-45-31	
	64	2 1/2	4×10	8×10	40°	2×9	-	1.6	1431-64R32-410/810-45-31	
	76	3	4×11	8×11	40°	2×9	-	2.6	1431-76R32-411/811-45-31	
	76	3	6×10	8×11	35°	2×9	-	2.6	1431-76R32-610/811-45-31	
	抛物线齿 Ballistic buttons									
		48	1 7/8	2×8	6×10	25°	2	1	0.9	1431-48R32-28/610-45-51
48		1 7/8	3×8	6×10	40°	3×5	-	0.9	1431-48R32-38/610-45-51	
51		2	2×10	6×10	40°	2×7	-	1.0	1431-51R32-210/610-45-51	
51		2	3×9	6×10	40°	3	1	1.0	1431-51R32-39/610-45-51	
54		2 1/8	3×9	6×10	40°	3	1	1.0	1431-54R32-39/610-45-51	
57		2 1/4	3×9	6×11	35°	3×6	-	1.3	1431-57R32-39/611-45-51	
57		2 1/4	3×10	6×11	35°	3×6	-	1.3	1431-57R32-310/611-45-51	
64		2 1/2	4×10	8×10	40°	2×9	-	1.6	1431-64R32-410/810-45-51	
圆齿 Spherical buttons										
柱齿易返钎头 Retrac button bit 	48	1 7/8	3×9	6×10	30°	3×5	-	1.2	1531-48R32-39/610-45-31	
	51	2	3×9	6×10	30°	3×6	-	1.4	1531-51R32-39/610-45-31	
	51	2	3×10	6×11	30°	3×6	-	1.4	1531-51R32-310/611-45-31	
	64	2 1/2	3*10, 1*10	6×11	35°	3×7	-	2.2	1533-64R32-410/611-45-31	
	64	2 1/2	4×10	8×10	40°	2×9	-	2.2	1531-64R32-410/810-45-31	
	76	3	4*11, 1*11	8×11	35°	4	1	3.5	1533-76R32-511/811-45-31	
	抛物线齿 Ballistic buttons									
	48	1 7/8	3×9	6×10	30°	3×5	-	1.2	1531-48R32-39/610-45-51	
	51	2	3×9	6×10	30°	3×6	-	1.4	1531-51R32-39/610-45-51	
	51	2	3×10	6×11	30°	3×6	-	1.4	1531-51R32-310/611-45-51	
	64	2 1/2	3*10, 1*10	6×11	35°	3×7	-	2.2	1533-64R32-410/611-45-51	
	64	2 1/2	4×10	8×10	40°	2×9	-	2.2	1531-64R32-410/810-45-51	

Drill bit 钎头	Diameter 直径		No×button diameter 合金数量×直径			Flushing hole 水孔		Weight Kg 重量	P/N 型号	
	mm 毫米	Inch 英寸	Front 中齿	Gauge 边齿	Angle 倾角	Front 正	Side 侧			
	柱齿扩孔钎头 Dome bit for reaming									
圆齿 Spherical buttons										
	76	3	1×13	9×13	35°	3	1	2.0	1441-76R32-113/913-45-31	
	89	3 1/2	1×13	14×13	35°	2×6	2×6	2.6	1441-89R32-113/1413-45-31	
	102	4	1×13	16×13	35°	2×6	2×6	3.2	1441-102R32-113/1613-45-31	
	127	5	1×13	18×13	35°	3	1	4.8	1441-127R31-113/1813-45-31	
	抛物线齿 Ballistic buttons									
	76	3	1×13	9×13	35°	3	1	2.0	1441-76R32-113/913-45-51	
	89	3 1/2	1×13	14×13	35°	2×6	2×6	2.6	1441-89R32-113/1413-45-51	
	102	4	1×13	16×13	35°	2×6	2×6	3.2	1441-102R32-113/1613-45-51	
127	5	1×13	18×13	35°	3	1	4.8	1441-127R32-113/1813-45-51		
十字型钎头 Cross-type bits										
	45	1 3/4	16×10		-	1	4	0.9	1221-45R32-16/10-42-23	
	48	1 7/8	16×10		-	1	4	0.9	1221-48R32-16/10-42-23	
	51	2	16×10		-	1	4	1.2	1221-51R32-16/10-42-23	
	57	2 1/4	16×10		-	1	4	1.3	1221-57R32-16/10-42-23	
	64	2 1/2	18×13		-	1	4	1.5	1221-64R32-18/13-42-23	
Drill rod 钎杆				Length 长度		Diameter 直径		Weight Kg 重量	P/N 型号	
				mm 毫米	Foot 英尺	Mm 毫米	Inch 英寸			
连接钎杆 Extension rod R32-Round32-R32				915	3	32	1 1/4	4.8	23R32-R32-0915-23	
内孔 Flushing hole 11.7mm.				1000	3' 33/8"	32	1 1/4	5.7	23R32-R32-1000-23	
扳手槽 Wrench flat 25.4mm.				1220	8"	32	1 1/4	6.5	23R32-R32-1220-23	
				1830	4	32	1 1/4	9.8	23R32-R32-1830-23	
				2435	6	32	1 1/4	13.2	23R32-R32-2435-23	
				3050	8	32	1 1/4	16.6	23R32-R32-3050-23	
				3660	10	32	1 1/4	20.0	23R32-R32-3660-23	
				快接钎杆 MF-rod R32-Round32-R32				915	3	32
内孔 Flushing hole 9.2mm.				1220	4	32	1 1/4	7.3	24R32-R32/46-1220-23	
扳手槽 Wrench flat 25.4mm.				1525	5	32	1 1/4	9.0	24R32-R32/46-1525-23	
				1830	6	32	1 1/4	10.6	24R32-R32/46-1830-23	
				2435	8	32	1 1/4	14.0	24R32-R32/46-2435-23	
				3050	10	32	1 1/4	17.1	24R32-R32/46-3050-23	
				3660	12	32	1 1/4	20.7	24R32-R32/46-3660-23	


导向快接钎杆 Guide speedrod R32-Round39-R32 内孔 Flushing hole 14.5mm. 快接头直径 Female end OD 46mm.	3050	10	39	1 1/2	27.0	24R39-R32/46-3050-23 24R39-R32/46-3660-23
	3660	12	39	1 1/2	32.0	



Guide tube 导向钻杆	Length 长度		Diameter 直径		Weight Kg 重量	P/N 型号
	mm 毫米	Inch 英寸	mm 毫米	Inch 英寸		
导向钻杆 Guide tube D46 适用 51-64mm 钎头 D46 for bits from 51-64mm	1220	4	46	1 3/4	10.0	24R46-R32/46-1220-23
	1525	5	46	1 3/4	12.5	24R46-R32/46-1525-23
	1830	6	46	1 3/4	14.2	24R46-R32/46-1830-23
	3050	10	46	1 3/4	25.0	24R46-R32/46-3050-23



Coupling 连接套	Length 长度		Diameter 直径		Thread 螺纹	Weight Kg 重量	P/N 型号
	mm 毫米	Inch 英寸	mm 毫米	Inch 英寸			
同径连接套 Coupling sleeves	150	6 1/8	44	1 3/4	R32	1.0	31-R32-44-150-23
	160	6 1/4	44	1 3/4	R32	1.0	31-R32-44-160-23



SHANDONG TAISHAN ROCK TOOLS CO., LTD

Mr:Rock Sui

Tel: 0086-635-6515509

Fax:0086-635-6515678

Mobile: +86 135 6302 6509

+86 138 6352 6509

Email:chinarocktool@163.com

rockdrillingtools@163.com

export@china-rocktool.com

export@rockdrillingtools.com

WeChat: +86 13563026509

WhatsApp: +86 135 6302 6509

SKYPE: sui671100

Website: www.rockdrillingtools.com

www.china-rocktool.com

