





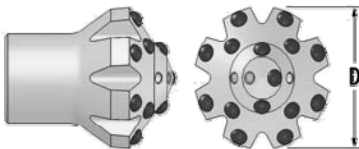






深孔螺纹钎具 Bench drilling T38

Drill bit 钎头		Diameter 直径		No×button diameter 合金数量×直径			Flushing 水孔		Weight Kg 重量	P/N 型号
		mm 毫米	Inch 英寸	Front 中齿	Gauge 边齿	Angle 倾角	Front 正	Side 侧		
柱齿形钎头 Button bit		圆齿 Spherical buttons								
	64	2 1/2	3×11	6×12	30°	3×7	-	1.6	1431-64T38-311/612-45-31	
	64	2 1/2	4×10	8×10	30°	3×7	-	1.6	1431-64T38-410/810-45-31	
	64	2 1/2	3×10, 1×10	6×11	35°	3×8	-	1.7	1433-64T38-410/611-45-31	
	64	2 1/2	4×10, 1×8	8×10	30°	4×7	-	1.7	1433-64T38-41018/810-31	
	70	2 3/4	4×11	8×11	40°	2×11	-	2.0	1431-70T38-411/811-45-31	
	70	2 3/4	6×10	8×10	35°	2×11	-	2.0	1431-70T38-610/810-45-31	
	70	2 3/4	3×10, 1×10	6×12	35°	3×8	-	2.0	1432-70T38-410/612-45-31	
	76	3	4×11	8×12	35°	2×11	-	2.5	1431-76T38-411/812-45-31	
	76	3	4×11	8×11	40°	2×11	-	2.5	1431-76T38-411/811-45-31	
	76	3	5×11	8×12	35°	2	1	2.4	1431-76T38-511/812-45-31	
	76	3	6×10	8×11	40°	2×11	-	2.4	1431-76T38-610/811-45-31	
	76	3	6×10	8×10	35°	2×11	-	2.4	1431-76T38-610/810-45-31	
	76	3	3×11, 1×11	6×13	35°	3	1	2.6	1432-76T38-411/613-45-31	
	76	3	4×11, 1×11	8×12	35°	4	1	2.7	1432-76T38-511/812-45-31	
	76	3	4×11, 1×11	8×11	35°	4	1	2.7	1432-76T38-511/811-45-31	
	76	3	4×10, 2×10	8×11	30°	4×7	-	2.7	1432-76T38-610/811-45-31	
	76	3	4×10, 2×10	8×11	35°	4×8	-	2.7	1432-76T38-610/811-45-31	
	89	3 1/2	4×13	8×13	40°	2×12	-	3.3	1431-89T38-413/813-45-31	
	89	3 1/2	5×13	8×13	40°	2×12	-	3.3	1431-89T38-513/813-45-31	
	89	3 1/2	6×11	8×12	35°	2×12	-	3.3	1431-89T38-611/812-45-31	
	89	3 1/2	6×12	8×12	35°	2×12	-	3.3	1431-89T38-612/812-45-31	
	89	3 1/2	6×12	8×13	35°	2×12	-	3.3	1431-89T38-612/813-45-31	
	89	3 1/2	6×10	9×11	35°	3×10	-	3.3	1431-89T38-610/911-45-31	
	89	3 1/2	3×12, 2×10	6×13	35°	3	1	3.3	1432-89T38-312210/613-31	
	89	3 1/2	3×11, 2×11	6×13	35°	3	1	3.3	1433-89T38-511/613-45-31	
	89	3 1/2	4×11, 1×11	8×12	35°	4×8	-	3.3	1432-89T38-511/812-45-31	
	89	3 1/2	4×12, 2×10	8×12	35°	4×8	-	3.3	1432-89T38-412210/812-31	
	102	4	6×12	8×14	35°	2×13	-	4.7	1431-102T38-612/814-31	
	102	4	4×13, 1×13	8×14	35°	4×9	-	4.6	1432-102T38-513/814-31	
	102	4	4×12, 4×10	8×12	35°	4×9	-	4.6	1433-102T38-412410/812	
	抛物线齿 Ballistic buttons									
	64	2 1/2	3×11	6×12	30°	3×7	-	1.6	1431-64T38-311/612-45-51	
	64	2 1/2	4×10	8×10	30°	3×7	-	1.6	1431-64T38-410/810-45-31	
	64	2 1/2	3×10, 1×10	6×11	35°	3×8	-	1.7	1433-64T38-410/611-45-31	
		64	2 1/2	3×10, 1×8	6×12	25°	3×8	-	1.7	1432-64T38-31018/612-31
		64	2 1/2	4×10, 1×8	8×10	30°	4×7	-	1.7	1432-64T38-41018/810-31


柱齿形钎头 Button bit	70	2 3/4	4×11	8×11	40°	2×11	-	2.0	1431-70T38-411/811-45-51
	70	2 3/4	3×11, 1×9	6×11	35°	3×8	-	2.0	1433-70T38-31119/611-51
	70	2 3/4	3×10, 1×10	6×11	35°	3×8	-	2.0	1433-70T38-410/611-45-51
	70	2 3/4	3×10, 1×8	6×12	25°	3×8	-	2.0	1433-70T38-31018/612-51
	76	3	4×11	8×12	35°	2×11	-	2.5	1431-76T38-411/812-45-51
	76	3	4×11	8×11	40°	2×11	-	2.5	1431-76T38-411/811-45-51
	76	3	5×11	8×12	35°	2	1	2.4	1431-76T38-511/812-45-51
	76	3	6×10	8×11	40°	2×11	-	2.4	1431-76T38-610/811-45-51
	76	3	6×10	8×10	35°	2×11	-	2.4	1431-76T38-610/810-45-51
	76	3	3×11, 1×11	6×13	35°	3	1	2.6	1433-76T38-411/613-45-51
	76	3	4×11, 1×11	8×12	35°	4	1	2.7	1432-76T38-511/812-45-51
	76	3	4×11, 1×11	8×11	35°	4	1	2.7	1432-76T38-511/811-45-51
	76	3	4×10, 2×10	8×11	30°	4×7	-	2.7	1432-76T38-610/811-45-51
	76	3	4×10, 2×10	8×11	35°	4×8	-	2.7	1433-76T38-610/811-45-51
	89	3 1/2	5×13	8×13	40°	2×12	-	3.3	1431-89T38-513/813-45-51
	89	3 1/2	6×12	8×13	35°	2×12	1	3.3	1431-89T38-612/813-45-51
	89	3 1/2	6×12	8×12	35°	2×12	-	3.3	1431-89T38-612/812-45-51
	89	3 1/2	6×10	9×11	35°	3×10	-	3.3	1431-89T38-610/911-45-51
	89	3 1/2	3×11, 2×11	6×13	35°	3	1	3.3	1432-89T38-511/613-45-51
	89	3 1/2	4×11, 1×11	8×12	35°	4×8	-	3.3	1433-89T38-511/812-45-51
	89	3 1/2	4×12, 2×10	8×12	35°	4×8	-	3.3	1432-89T38-412210/812-51
	102	4	6×12	8×14	35°	2×13	-	4.7	1431-102T38-612/814-51
	102	4	4×13, 1×13	8×14	35°	4×9	-	4.6	1432-102T38-513/814-51
柱齿易返钎头 Retrac button bit	圆齿 Spherical buttons								
	64	2 1/2	4×10	8×10	30°	2×11	-	2.2	1531-64T38-410/810-45-31
	64	2 1/2	3×10, 1×10	6×11	35°	3×8	-	2.6	1533-61T38-410/611-45-31
	70	2 3/4	4×11	8×11	40°	2×11	-	2.4	1531-70T38-411/811-45-31
	70	2 3/4	6×10	8×10	35°	2×11	-	2.4	1531-70T38-610/810-45-31
	70	2 3/4	3×10, 1×10	6×12	35°	3×8	-	2.4	1632-70T38-410/612-45-31
	76	3	4×11	8×11	40°	2×11	-	3.0	1531-76T38-411/811-45-31
	76	3	4×11	8×12	35°	2×11	-	3.0	1531-76T38-411/812-45-31
	76	3	4×11, 1×11	8×11	35°	4	1	3.3	1632-76T38-511/811-45-31
	76	3	3×12, 1×9	6×14	35°	3	1	3.3	1632-76T38-3121-/614-31
	89	3 1/2	4×13	8×13	40°	2	-	4.8	1531-89T38-413/813-45-31
	89	3 1/2	5×13	8×13	40°	2×12	-	4.8	1531-89T38-513/813-45-31
	89	3 1/2	6×12	8×12	35°	2×12	-	4.8	1531-89T38-612/812-45-31
	89	3 1/2	6×12	8×13	35°	2×12	-	4.8	1531-89T38-612/813-45-31
	89	3 1/2	4×11, 2×9	8×11	35°	4	1	4.8	1533-89T38-412210/812-31
	89	3 1/2	4×12, 2×10	8×12	35°	4	1	4.8	1632-89T38-412210/812-31

抛物线齿 Ballistic buttons									
	64	2 1/2	4×10	8×10	30°	2×11	-	2.2	1531-64T38-410/810-45-51
	64	2 1/2	3×10, 1×10	6×11	35°	3×8	-	2.6	1533-64T38-410/611-45-51
	70	2 3/4	4×11	8×11	40°	2×11	-	2.4	1531-70T38-411/811-45-51
	70	2 3/4	6×10	8×10	35°	2×11	-	2.4	1531-70T38-610/810-45-51
	70	2 3/4	3×10, 1×10	6×12	35°	3×8	-	2.4	1532-70T38-410/612-45-51
	76	3	4×11	8×11	40°	2×11	-	3.0	1531-76T38-411/811-45-51
	76	3	4×11	8×12	35°	2×11	-	3.0	1531-76T38-411/812-45-51
	76	3	4×11, 1×11	8×11	35°	4	1	3.3	1632-76T38-511/811-45-51
	76	3	3×12, 1×9	6×14	35°	3	1	3.3	1632-76T38-31219/614-51
	89	3 1/2	4×13	8×13	40°	2	-	4.8	1531-89T38-413/813-45-51
	89	3 1/2	5×13	8×13	40°	2×12	-	4.8	1531-89T38-513/813-45-51
	89	3 1/2	6×12	8×12	35°	2×12	-	4.8	1531-89T38-612/812-45-51
	89	3 1/2	6×12	8×13	35°	2×12	-	4.8	1531-89T38-612/813-45-51
	89	3 1/2	4×11, 2×9	8×11	35°	4	1	4.8	1632-89T38-41129/811-51


X 型钎头 X-type bit									
	64	2 1/2	25×13	-	1×7.5	2×7.5	1.9	1321-64T38-25/13-42-23	
	76	3	25×13	-	1×7.5	2×7.5	2.5	1321-76T38-25/13-42-23	
柱齿扩孔钎头 Dome bit for reaming									
	圆齿 Spherical buttons								
	102	4	1×12	16×12	35°	2	2	3.8	1441-102T38-112/1612-31
	127	5	1×12	18×12	35°	1	3	5.2	1441-102T38-112/1812-31
	抛物线齿 Ballistic buttons								
	102	4	1×12	16×12	35°	2	2	3.8	1441-102T38-112/1612-31
	127	5	1×12	18×12	35°	1	3	5.2	1441-102T38-112/1812-31

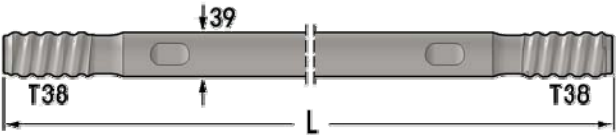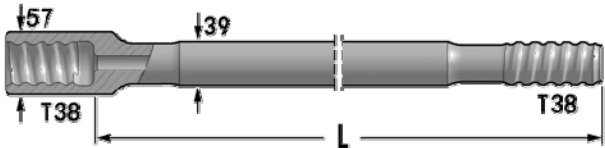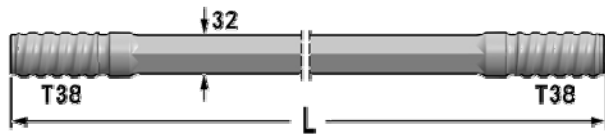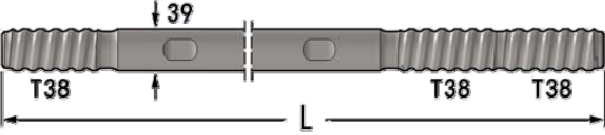钎杆 Drill rod	长度 Length		外径 Diameter		重量 Weight approx kg	型号 P/N
	毫米 mm	英尺 Foot	毫米 mm	英寸 inch		
连接钎杆 Extension rod T38-Round39-T38 内孔 Flushing hole 14.5mm. 扳手槽 Wrench flat 32mm. 	1220	4	39	1 1/2	10.2	23R39-T38-1220-23
	1525	5	39	1 1/2	12.8	23R39-T38-1525-23
	1830	6	39	1 1/2	15.3	23R39-T38-1830-23
	2435	8	39	1 1/2	20.4	23R39-T38-2435-23
	3050	10	39	1 1/2	25.5	23R39-T38-3050-23
	3660	12	39	1 1/2	30.9	23R39-T38-3660-23
	3965	13	39	1 1/2	33.2	23R39-T38-3965-23
	4270	14	39	1 1/2	35.7	23R39-T38-4270-23
	4880	16	39	1 1/2	41.0	23R39-T38-4880-23
	5530	18' 11/2"	39	1 1/2	46.3	23R39-T38-5530-23
	6095	20	39	1 1/2	50.9	23R39-T38-6095-23
快接钎杆 MF-rod T38-Round39-T38 内孔 Flushing hole 14.5mm. 	915	3	39	1 1/2	10.7	24R39-T38/57-0915-23
	1220	4	39	1 1/2	13.3	24R39-T38/57-1220-23
	1525	5	39	1 1/2	15.8	24R39-T38/57-1525-23
	1830	6	39	1 1/2	20.9	24R39-T38/57-1830-23
	3050	10	39	1 1/2	26.0	24R39-T38/57-3050-23
	3660	12	39	1 1/2	31.4	24R39-T38/57-3660-23
	4270	14	39	1 1/2	35.7	24R39-T38/57-4270-23
	4880	16	39	1 1/2	41.5	24R39-T38/57-4880-23
六方连接杆 Light extension rod, T38-Hex32-T38 内孔 Flushing hole 9.6mm. 	1220	4	32	1 1/4	8.6	23H32-T38-1220-23
	1830	6	32	1 1/4	12.6	23H32-T38-1830-23
	2435	8	32	1 1/4	16.6	23H32-T38-2435-23
	3050	10	32	1 1/4	20.8	23H32-T38-3050-23
	3660	12	32	1 1/4	24.9	23H32-T38-3660-23
双头螺纹钎杆 Double thread rod T38-Round39-T38 内孔 Flushing hole 14.5mm. 扳手槽 Wrench flat 32mm. 	3050	10	46	1 3/4	35.9	23R39-T38/2T38-3050-23
	3660	12	46	1 3/4	43.1	23R39-T38/2T38-3660-23


导向快接钎杆 Guide speedrod T38-Round46-T38 内孔 Flushing hole 17mm. 快接头直径 Female end OD 57mm.	1830	6	46	1 3/4	21.6	24R446-T38/57-1830-23
	3050	10	46	1 3/4	35.9	24R446-T38/57-3050-23
	3660	12	46	1 3/4	43.1	24R446-T38/57-3660-23
	4270	14	46	1 3/4	50.2	24R446-T38/57-4270-23
	4880	16	46	1 3/4	57.4	24R446-T38/57-4880-23
	5530	18' 11/2"	46	1 3/4	65.0	24R446-T38/57-5530-23
	6095	20	46	1 3/4	71.7	24R446-T38/57-6095-23

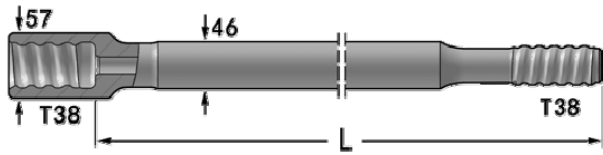

Guide tube 导向钻杆	Length 长度		Diameter 直径		Weight Kg 重量	P/N 型号
	mm 毫米	Inch 英寸	mm 毫米	Inch 英寸		
导向钻杆 Guide tube D56 适用 64—76mm 钎头, D64 适用 76—89mm 钎头 D56 for bits from 64-76mm and D64 for bits from 76-89mm 快接头直径 Female end OD 56/64mm	1220	4	56	2 1/8	12.6	24G56-T38/56-1220-23
	1525	5	56	2 1/8	14	24G56-T38/56-1525-23
	1830	6	56	2 1/8	17.4	24G56-T38/56-1830-23
	3050	10	56	2 1/8	28.3	24G56-T38/56-3050-23
	3660	12	56	2 1/8	32.8	24G56-T38/56-3660-23
	4920	16' 2"	56	2 1/8	47.9	24G56-T38/56-4920-23
	3660	12	64	2 1/2	51	24G64-T38/64-3660-23

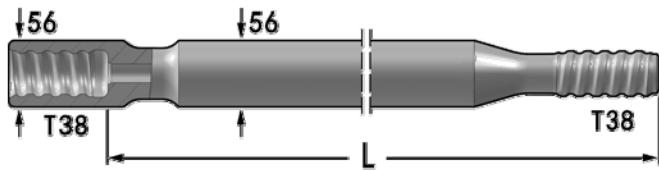

Coupling 连接套	Length 长度		Diameter 直径		Thread 螺纹	Weight Kg 重量	P/N 型号
	mm 毫米	Inch 英寸	mm 毫米	Inch 英寸			
同径连接套 Coupling sleeves	170	6 3/4	55	2 5/32	T38	1.8	31-T38-55-170-23
	190	7 1/2	55	2 5/32	T38	2.1	31-T38-55-190-23



SHANDONG TAISHAN ROCK TOOLS CO., LTD

Mr:Rock Sui

Tel: 0086-635-6515509

Fax:0086-635-6515678

Mobile: +86 135 6302 6509

+86 138 6352 6509

WeChat: +86 13563026509

WhatsApp: +86 135 6305 6509

SKYPE:sui671100

Website:www.rockdrillingtools.com

www.china-rocktool.com

Email:chinarocktool@163.com

rockdrillingtools@163.com

export@china-rocktool.com

export@rockdrillingtools.com