






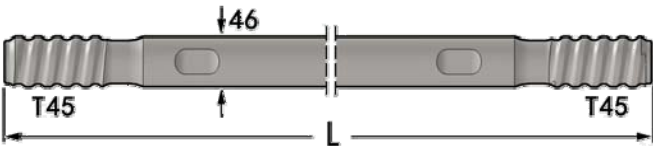
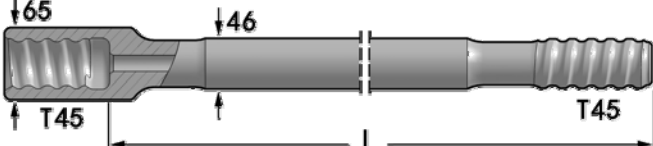
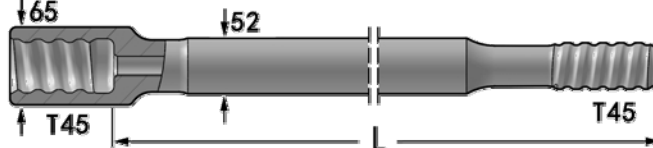
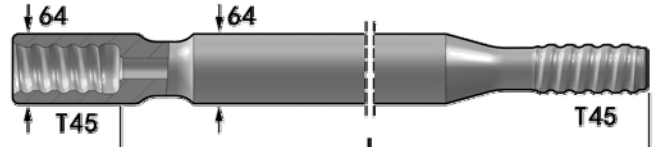


深孔螺纹钎具 Bench drilling T45

Drill bit 钎头	Diameter 钎头		No×button diameter 合金数量×直径			Flushing hole 水孔		Weight Kg 重量	P/N 型号
	mm 毫米	Inch 英寸	Front 中齿	Gauge 边齿	Angle 倾角	Front 正	Side 侧		
	圆齿 Spherical buttons								
柱齿形钎头 Button bit 	70	2 3/4	4×11	8×11	40°	2×12	-	2.3	1431-70T45-411/811-45-31
	70	2 3/4	3×11, 1×9	6×11	35°	3×9	-	2.2	1433-70T45-31119/611-31
	70	2 3/4	3×11, 1×9	6×12	35°	3×9	-	2.2	1432-70T45-31119/612-31
	70	2 3/4	4×10, 1×9	8×11	35°	4×8	-	2.2	1432-70T45-41019/811-31
	76	3	4×11	8×11	40°	2×12	-	2.6	1431-76T45-411/811-45-31
	76	3	4×11	8×12	30°	2×12	-	2.6	1431-76T45-411/812-45-31
	76	3	4×12	8×12	30°	2×12	-	2.6	1431-76T45-412/812-45-31
	76	3	5×11	8×12	35°	2×12	1	2.6	1431-76T45-511/812-45-31
	76	3	5×11	8×13	35°	2×12	1	2.6	1431-76T45-511/813-45-31
	76	3	6×10	8×11	35°	2×12	-	2.6	1431-76T45-610/811-45-31
	76	3	3×11, 1×11	6×13	35°	3×9	1	2.4	1432-76T45-411/613-45-31
	76	3	4×11, 1×11	8×11	35°	4×8	-	2.6	1433-76T45-511/811-45-31
	76	3	4×11, 1×11	8×13	35°	4×8	-	2.6	1433-76T45-511/813-45-31
	89	3 1/2	4×13	8×13	40°	2×13	-	4.6	1431-89T45-413/813-45-31
	89	3 1/2	5×13	8×13	35°	2×13	-	4.6	1431-89T45-513/813-45-31
	89	3 1/2	6×12	8×12	35°	2×13	-	4.6	1431-89T45-612/812-45-31
	89	3 1/2	6×13	8×13	35°	2×13	-	4.6	1431-89T45-613/813-45-31
	89	3 1/2	6×12	8×14	35°	2×13	2	4.6	1431-89T45-612/814-45-31
	89	3 1/2	6×10	9×11	35°	3×10	-	4.6	1431-89T45-610/911-45-31
	89	3 1/2	3×11, 2×11	6×13	35°	3×10	1	4.1	1432-89T45-511/613-45-31
	89	3 1/2	3×13, 2×9	6×13	35°	3×10	-	4.1	1433-89T45-31329/613-31
	89	3 1/2	3×12, 2×10	6×14	35°	3×10	-	4.1	1432-89T45-312210/614-31
	89	3 1/2	4×11, 1×11	8×13	35°	4×8	-	4.6	1432-89T45-511/813-45-31
	89	3 1/2	4×11, 2×11	8×12	35°	4×8	-	4.6	1433-89T45-611/812-45-31
	89	3 1/2	4×12, 2×10	8×12	35°	4×8	-	4.6	1433-89T45-412210/812-31
	102	4	5×14	8×14	40°	2×14	-	5.0	1431-102T45-514/814-45-31
	102	4	6×12	8×14	35°	2×14	-	5.0	1431-102T45-612/814-45-31
	102	4	6×13	8×16	40°	2×14	1	5.0	1431-102T45-613/816-45-31
	102	4	7×12	8×14	35°	2	2	5.0	1431-102T45-712/814-45-31
	102	4	6×12	9×12	35°	3×10	-	5.0	1431-102T45-612/912-45-31
	102	4	3×13, 2×13	6×14	35°	3	1	4.5	1432-102T45-513/614-45-31
	102	4	4×13, 1×13	8×14	35°	4×9	-	4.5	1433-102T45-513/814-45-31

柱齿形钎头 Button bit		抛物线齿 Ballistic buttons								
		70	2 3/4	3×11, 1×9	6×11	35°	3×9	-	2.2	1433-70T45-31119/611-51
	70	2 3/4	3×11, 1×9	6×12	35°	3×9	-	2.2	1432-70T45-31119/612-51	
	76	3	4×11	8×11	40°	2×12	-	2.6	1431-76T45-411/811-45-51	
	76	3	4×11	8×12	30°	2×12	-	2.6	1431-76T45-411/812-45-51	
	76	3	4×12	8×12	30°	2×12	-	2.6	1431-76T45-412/812-45-51	
	76	3	5×11	8×12	35°	2×12	1	2.6	1431-76T45-511/812-45-51	
	76	3	5×11	8×13	35°	2×12	1	2.6	1431-76T45-511/813-45-51	
	76	3	6×10	8×11	35°	2×12	-	2.6	1431-76T45-610/811-45-51	
	76	3	3×11, 1×11	6×13	35°	3×9	1	2.4	1432-76T45-411/613-45-51	
	76	3	4×11, 1×11	8×11	35°	4×8	-	2.6	1433-76T45-511/811-45-51	
	76	3	4×11, 1×11	8×13	35°	4×8	-	2.6	1433-76T45-511/813-45-51	
	89	3 1/2	4×13	8×13	40°	2×13	-	4.6	1431-89T45-413/813-45-51	
	89	3 1/2	5×13	8×13	35°	2×13	-	4.6	1431-89T45-513/813-45-51	
	89	3 1/2	6×12	8×12	35°	2×13	-	4.6	1431-89T45-612/812-45-51	
	89	3 1/2	6×13	8×13	35°	2×13	-	4.6	1431-89T45-613/813-45-51	
	89	3 1/2	6×12	8×14	35°	2×13	2	4.6	1431-89T45-612/814-45-51	
	89	3 1/2	6×10	9×11	35°	3×10	-	4.6	1431-89T45-610/911-45-51	
	89	3 1/2	3×11, 2×11	6×13	35°	3×10	1	4.1	1432-89T45-511/613-45-51	
	89	3 1/2	3×13, 2×9	6×13	35°	3×10	-	4.1	1432-89T45-31329/613-51	
	89	3 1/2	3×12, 2×10	6×14	35°	3×10	-	4.1	1432-89T45-312210/614-51	
	89	3 1/2	4×11, 1×11	8×13	35°	4×8	-	4.6	1433-89T45-511/813-45-51	
	89	3 1/2	4×11, 2×11	8×12	35°	4×8	-	4.6	1433-89T45-611/812-45-51	
	89	3 1/2	4×12, 2×10	8×12	35°	4×8	-	4.6	1432-89T45-412210/812-51	
	102	4	5×14	8×14	40°	2×14	-	5.0	1431-102T45-514/814-45-51	
	柱齿易返钎头 Retrac button bit		圆齿 Spherical buttons							
70			2 3/4	4×10	8×10	30°	2	2	2.5	1531-70T45-410/810-45-31
	70	2 3/4	4×10, 1×10	8×10	35°	4×7	-	2.4	1533-70T45-510/810-45-31	
	76	3	4×11	8×11	40°	2×12	-	3.1	1531-76T45-411/811-45-31	
	76	3	5×11	8×12	35°	2	1	3.2	1531-76T45-511/812-45-31	
	76	3	5×11	8×13	35°	2	1	3.2	1531-76T45-511/813-45-31	
	76	3	6×10	8×11	35°	2×12	-	3.2	1531-76T45-610/811-45-31	
	76	3	4×11, 1×11	8×11	35°	4	1	3.2	1533-76T45-511/811-45-31	
	76	3	4×11, 1×11	8×13	35°	4	1	3.1	1632-76T45-511/813-45-31	
	76	3	4×10, 2×10	8×11	30°	4×7	-	3.1	1632-76T45-610/811-45-31	
	89	3 1/2	4×13	8×13	40°	2×13	-	5.3	1531-89T45-612/812-45-31	
	89	3 1/2	6×12	8×12	30°	2	2	5.3	1531-89T45-413/813-45-31	
	89	3 1/2	6×13	8×13	35°	2×13	-	4.6	1531-89T45-613/813-45-31	
	89	3 1/2	6×12	8×14	30°	2	2	5.3	1531-89T45-612/814-45-31	
	89	3 1/2	4×11, 1×11	8×13	35°	4×8	-	5.4	1533-89T45-511/813-45-31	
	89	3 1/2	4×11, 2×11	8×12	35°	4×8	-	5.4	1533-89T45-611/812-45-31	
	89	3 1/2	4×12, 2×10	8×12	35°	4	1	5.4	1632-89T45-412210/812-31	
	102	4	4×12, 2×10	8×14	35°	4	1	6.8	1531-102T45-412210/814-31	

Drill rod 钎杆	Length 长度		Diameter 直径		Weight Kg 重量	P/N 型号
	mm	Foot	mm	Inch		
	毫米	英尺	毫米	英寸		
连接钎杆 Extension rod T45-Round46-T45 内孔 Flushing hole 17mm. 扳手槽 Wrench flat 38mm. 	1830	6	46	1 3/4	21.6	23R46-T45-1830-23
	2435	8	46	1 3/4	28.7	23R46-T45-2435-23
	3050	10	46	1 3/4	35.9	23R46-T45-3050-23
	3660	12	46	1 3/4	43.1	23R46-T45-3660-23
	4880	16	46	1 3/4	57.4	23R46-T45-4880-23
	5530	18	46	1 3/4	65.0	23R46-T45-5530-23
	6095	20	46	1 3/4	71.7	23R46-T45-6095-23
快接钎杆 MF-rod T45-Round46-T45 内孔 Flushing hole 17mm. 快接头直径 Female end OD 65mm 	1830	6	46	1 3/4	22.1	24R46-T45/65-1830-23
	3050	10	46	1 3/4	36.4	24R46-T45/65-3050-23
	3660	12	46	1 3/4	43.6	24R46-T45/65-3660-23
	4880	16	46	1 3/4	57.9	24R46-T45/65-4880-23
	5530	18	46	1 3/4	65.5	24R46-T45/65-5530-23
	6095	20	46	1 3/4	72.2	24R46-T45/65-6095-23
导向快接钎杆 Guide speedrod T45-Round52-T45 内孔 Flushing hole 21.5mm. 快接头直径 Female end OD 65mm. 	3050	10	52	2	46.6	24R52-T45/65-3050-23
	3660	12	52	2	55.8	24R52-T45/65-3660-23
	4880	16	52	2	74.2	24R52-T45/65-4880-23
	5530	18	52	2	84.0	24R52-T45/65-5530-23
	6095	20	52	2	92.6	24R52-T45/65-6095-23

Guide tube 导向钻杆	Length 长度		Diameter 直径		Weight Kg 重量	P/N 型号
	mm	Inch	Mm	Inch		
	毫米	英寸	毫米	英寸		
导向钻杆 Guide tube D64 适用 76—89mm 钎头, D76 适用 89—102mm 钎头 D64 for bits from 76-89mm and D76 for bits from 89-102mm 	1220	4	64	2 1/8	12.6	24G64-T45/64-1220-23
	1525	5	64	2 1/8	14	24G64-T45/64-1525-23
	1830	6	64	2 1/8	17.4	24G64-T45/64-1830-23
	3050	10	64	2 1/8	28.3	24G64-T45/64-3050-23
	3660	12	64	2 1/8	32.8	24G64-T45/64-3660-23
	1830	6	76	3	40.0	24G76-T45/76-1830-23
	3660	12	76	3	77.8	24G76-T45/76-3660-23

SHANDONG TAISHAN ROCK TOOLS CO., LTD

Mr:Rock Sui

Tel: 0086-635-6515509

Fax:0086-635-6515678

Mobile: +86 135 6302 6509

+86 138 6352 6509

Email:chinarocktool@163.com

rockdrillingtools@163.com

export@china-rocktool.com

export@rockdrillingtools.com

WeChat: +86 13563026509

WhatsApp: +86 135 6302 6509

SKYPE: sui671100

Website: www.rockdrillingtools.com

www.china-rocktool.com

**ADD: Xihu Town 10#, Yanggu ,Liaocheng city , Shandong province ,
China**