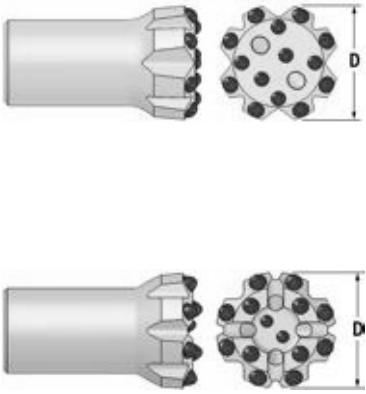
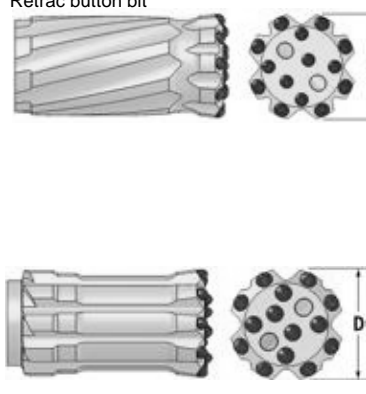
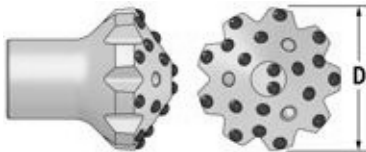
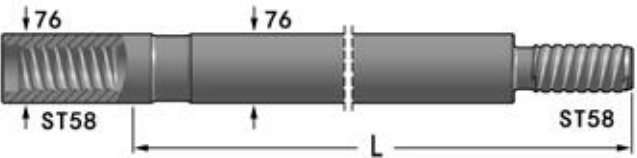


钻头 Drill bit	钻头直径		合金数量×直径			水孔数量		重量	型号 P/N
	Diameter		Noxbutton diameter			Flushing hole		Weight	
	毫米 mm	英寸 inch	芯齿 Front	边齿 Gauge	倾角 Angle	正 Front	侧 Side	approx kg	
柱齿形钎头 Button bit  	圆齿 Spherical buttons								
	89	3 1/2	6×12	8×12	35°	2	1	4.1	1431-89ST58-612/812-45-31
	89	3 1/2	6×13	8×13	35°	2	1	4.1	1431-89ST58-613/813-45-31
	89	3 1/2	4×13,1×13	8×13	35°	4	-	4.1	1432-89ST58-513/813-45-31
	89	3 1/2	4×12,2×12	8×12	35°	4	-	4.1	1433-89ST58-612/812-45-31
	95	3 3/4	4×13,1×13	8×14	35°	4	-	4.6	1433-89ST58-513/814-45-31
	102	4	6×14	8×14	35°	2	-	6.0	1431-89ST58-614/814-45-31
	102	4	6×13	8×16	35°	2	1	6.0	1431-89ST58-613/816-45-31
	115	4 1/2	6×14	8×16	35°	2	-	7.0	1431-89ST58-614/816-45-31
	抛物线齿 Parabolic buttons								
89	3 1/2	6×12	8×12	35°	2	1	4.1	1431-89ST58-612/812-45-51	
89	3 1/2	6×13	8×13	35°	2	1	4.1	1431-89ST58-613/813-45-51	
89	3 1/2	4×13,1×13	8×13	35°	4	-	4.1	1432-89ST58-513/813-45-51	
89	3 1/2	4×12,2×12	8×12	35°	4	-	4.1	1433-89ST58-612/812-45-51	
95	3 3/4	4×13,1×13	8×14	35°	4	-	4.6	1433-95ST58-513/814-45-51	
102	4	6×14	8×14	35°	2	-	6.0	1431-102ST58-614/814-45-51	
102	4	6×13	8×16	35°	2	1	6.0	1431-102ST58-613/816-45-51	
115	4 1/2	6×14	8×16	35°	2	-	7.0	1431-115ST58-614/816-45-51	
易返钎头 Retrac button bit  	圆齿 Spherical buttons								
	89	3 1/2	6×12	8×14	35°	2	1	5.1	1531-89ST58-612/814-45-31
	89	3 1/2	4×13,1×13	8×13	35°	4	-	5.1	1531-89ST58-612/814-45-31
	102	4	7×12	8×14	35°	2	1	6.5	1531-102ST58-712/814-45-31
	115	4 1/2	6×14	8×16	35°	2	-	8.5	1531-115ST58-614/816-45-31
	抛物线齿 Parabolic buttons								
	89	3 1/2	6×12	8×14	35°	2	1	5.1	1531-89ST58-612/814-45-51
	89	3 1/2	4×13,1×13	8×13	35°	4	-	5.1	1632-89ST58-513/813-45-51
	102	4	7×12	8×14	35°	2	1	6.5	1531-102ST58-712/814-45-51
	115	4 1/2	6×14	8×16	35°	2	-	8.5	1531-115ST58-614/816-45-51

钻头 Drill bit	钎头直径		合金数量x直径			水孔数量		重量	型号
	Diameter		Noxbutton diameter			Flushing hole		Weight	P/N
	毫米 mm	英寸 inch	芯齿 Front	边齿 Gauge	倾角 Angle	正 Front	侧 Side	approx kg	
扩孔钎头 Reaming bit  	圆齿 Spherical buttons								
	152	6	6x16	9x16	35°	3	-	13.0	1441-152ST58-616/916-45-31
	152	6	2x14	18x14	35°	3	3	10.4	1441-152ST58-214/1814-45-31
	抛物线齿 Parabolic buttons								
	152	6	6x16	9x16	35°	3	-	13.0	1441-152ST58-616/916-45-51
	152	6	2x14	18x14	35°	3	3	10.4	1441-152-ST58-214/1814-45-51

钎杆 Drill rod	长度		外径		重量	型号
	毫米 mm	英尺 Foot	毫米 mm	英寸 inch	approx kg	P/N
钻杆 内孔直径26mm Drill tube, Flushing hole 26mm.  	1525	5'	76	2 3/8	34.0	24G76-ST58/76-1525-23
	1830	6'	76	2 3/8	40.0	24G76-ST58/76-1830-23
	3660	12'	76	2 3/8	76.3	24G76-ST58/76-3660-23

SHANDONG TAISHAN ROCK TOOLS CO., LTD

Mr:Rock Sui

Tel: 0086-635-6515509

Fax:0086-635-6515678

Mobile: +86 135 6302 6509

+86 138 6352 6509

WhatsApp: +86 135 6302 6509

WeChat: +86 13563026509

SKYPE:sui671100

Website:www.rockdrillingtools.com

www.china-rocktool.com

Email:chinrocktool@163.com

rockdrillingtools@163.com

export@china-rocktool.com

export@rockdrillingtools.com

